

## **IMP-LR**

# Low Range Industrial Pressure Transmitter

- Oil filled Isolated diaphragm, silicon sensor
- Accuracy: <±0.25% FS BFSL (0.1% optional)</p>
- > Pressure ranges from 25mbar to 1000mbar
- Selection of process & electrical connections
- Variety of Outputs including Volts and mA

The low range pressure transmitter, IMP-LR, has a piezo-resisitive silicon pressure sensor which is an oil filled isolated diaphragm. The sensor and housing are made from stainless steel with a choice of internal O ring seals to ensure the product is suitable for a wide range of applications. Every device is temperature compensated and calibrated and supplied with a traceable serial number and calibration certificate. The electronics incorporates a microprocessor based amplifier, this means there are no adjusting pots and therefore the electronics are very stable, especially in high vibration / shock applications.

### There are many options available on the IMP-LR pressure transmitter. These include the following:

- Pressure range and engineering units
- Pressure reference (G, SG or Abs)
- Output type
- Accuracy Level (Non-linearity & hysteresis)
- Thermal accuracy
- Electrical connection
- Process connection
- Process connection material
- O ring seal material

#### Suitable for the following applications:

- Pneumatics
- Laboratory testing
- Mechanical engineering
- Environmental engineering
- Automotive testing
- Tank gauging
- HVAC

 $\epsilon$ 

MP-LR Low Range Pressure Transmi

#### Low Range Industrial Pressure Transmitter

Input Pressure Range										
Nominal pressure, Gauge	mbar	25	40	60	100	160	250	400	600	1000
Permissible Overpressure	mbar	100	100	200	400	400	700	1400	1400	2000

utput Signal & Supply Voltage					
Wire system	Output	Supply Voltage			
2-wire	4 - 20mA	9 – 32V dc			
	0 – 5V dc	9 – 32V dc			
	0 – 10V dc	13 – 32V dc			
	1 – 5V dc	9 – 32V dc			
3-wire	1 – 10V dc	13 – 32V dc			
	1 – 6V dc	9 – 32V dc			
	0 – 6V dc	9 – 32V dc			
	0.5 to 4.5V dc	5V dc			

Performance				
Accuracy (Non-linearity & hysteresis)	<±0.25% / FS (BFSL) <±0.1% / FS (BFSL) optional			
Setting Errors (offsets)	2-wire 3-wire	Zero & Full Scale, <±0.5% / FS Zero & Full Scale, <±0.5% / FS		
Permissible Load	2-wire 3-wire	Rmax = [(VS – VS min) / 0.02] $\Omega$ Rmin = 10 k $\Omega$		
Influence Effects	Supply	$0.5$ to $4.5V$ – Ratiometric, other outputs - <0.005 % FS / 1V $$0.05$ % FSO / $k\Omega$		

Permissible Temperatures & Thermal Effe	cts				
Media temperature	-40°C to +120°C				
Ambient temperature	-20° to +80°C				
Storage temperature	-40°C to +120°C				
Compensated temperature range	+20°C to +80°C				
The cond 7 con Chiff (T7C)	<±0.04% / FS / °C (option code 4)				
Thermal Zero Shift (TZS)	<±0.02% / FS / °C (option code 2)				
Thermal Span Shift (TSS)	<-0.015% / °C				

#### Low Range Industrial Pressure Transmitter


Electrical Protection	
Supply reverse polarity protection	No damage but also no function
Electromagnetic compatibility	CE Compliant

Mechanical Stability	
Shock	100 g / 11 ms
Vibration	10 g RMS (20 2000 Hz)

Materials	
Housing & process connection	303 Stainless Steel
riousing & process connection	316L Stainless Steel (optional)
	Viton
'O' ring seals	NBR, Nitrile (optional)
	EPDM (optional)
Diaphragm	316L Stainless Steel
Media wetted parts	Housing and process connection, 'O' ring seal, diaphragm

Miscellaneous					
Current consumption	2-wire,	Limits at 28mA			
carrent consumption	3-wire	Typ. 6mA			
Weight	Approx. 100g				
Installation position	Any, <0.1% FS of capsule on Zero shift for 90° tilt in any direction				
Operation Life	> 100 x 10 <sup>6</sup> cycles				
Insulation Resistance	>500M Ω at 50V dc				

Wiring [	Designation							
		Small Plug & Socket (Code A)	Large Plug & Socket (Code B)	IP66 Cable ( <b>Code C</b> )	AMP 6-pin Bayonnet (Code D)	IP68 Vented Cable (Code E)	Binder 6-pin connector (Code F)	M12x1, 4-pin connector (Code G)
2-wire	+ve Supply	Pin 1	Pin 1	Red	Pin 1	Red	Pin 1	Pin 1
	-ve Supply	Pin 2	Pin 2	Blue	Pin 2	Blue	Pin 2	Pin 2
	Ground	Earth Pin	Earth Pin	Green	Earth Pin	White	Pin 3	Pin 3
3-wire	+ve Supply	Pin 1	Pin 1	Red	Pin 1	Red	Pin 1	Pin 1
	-ve Supply	Pin 2	Pin 2	Blue	Pin 2	Blue	Pin 2	Pin 2
	+ve Output	Pin 3	Pin 3	Green	Pin 3	White	Pin 3	Pin 3
	Ground	Earth Pin	Earth Pin	Yellow	Earth Pin	Yellow	Pin 4	Pin 4

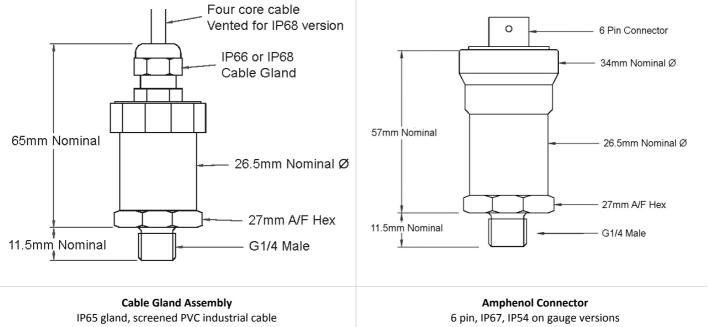

DSN001 Issue: 01 Ref: 050209



#### Website

#### www.SensorsONE.co.uk

#### **Email**

enquiries [at] SensorsONE.co.uk

**QR** Code

Save the SensorsONE website address to your mobile smartphone by scanning this QR code

