

EE08 Series


High-Precision Miniature Humidity / Temperature Transmitter

Accurate humidity / temperature measurement over a wide working range, fitted in a small-sized housing and high flexibility have been the main goals for the development of the EE08 series.

Low power consumption and short start-up time support efficient energy management for battery operated systems. For this application an additional version (V10) with supply voltage 4.5-15V DC has been developed.

Calibration data and other relevant functions like linearization or temperature compensation are stored in the probe. This feature, together with the optional connector, allows for easy replacement of the probe without a need for re-adjustment of the reading device (interchangeability).

The humidity and temperature measurement are available as analogue outputs (0-1/2.5/5V) and as a digital interface (E2-interface). Easy implementation and data processing is warranted. Humidity and temperature reading can be re-adjusted using the calibration software; available as an accessory. The configuration equipment allows humidity and temperature adjustment of the sensor.

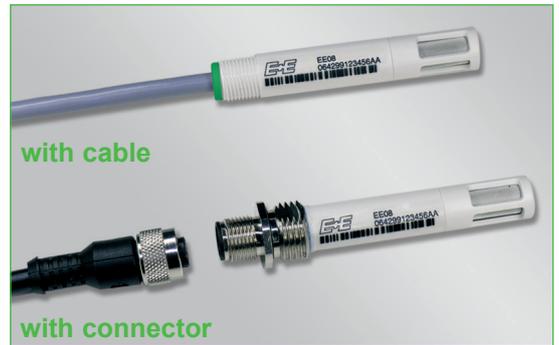

Typical Applications

- meteorology / weather stations
- humidity / temperature data logging
- incubators
- fermentation chambers
- green houses
- snow machines
- dry storage facilities

Features

- small dimensions
- wide working range, high accuracy
- traceable calibration
- customer adjustment possible
- interchangeable in seconds
- low power consumption / short start-up time
- analogue outputs / digital interface

Technical Data


Measuring values

Relative Humidity

Sensor	HC101	
Working range ¹⁾	0...100% RH	
Digital output (2 wire) ²⁾	output value: 0.00...100.00% RH	
Analogue output 0...100% RH	0-1/2.5/5/10V	-0.2mA < I _L < 0.2mA
Accuracy at 20°C (68°F) and 12V DC	±2% RH (0...90% RH)	±3% RH (90...100% RH)
Temperature dependence	Traceable to intern. standards, administrated by NIST, PTB, BEV... typ. 0.03% RH/°C (typ. 0.02% RH/°F)	

Temperature

Sensor	Pt 1000 (DIN A)	
Digital output (2 wire) ²⁾	output value: -40.00...+80.00°C (-40...176°F)	
Analogue output	0-1/2.5/5/10V	-0.2mA < I _L < 0.2mA
Accuracy at 12/24V DC		

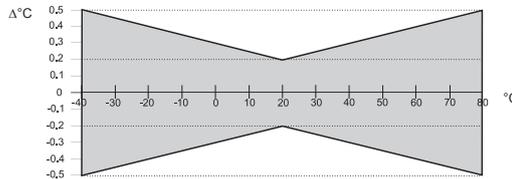

General

Supply voltage	output 0-1V / 0-2.5V	4.5-15V DC or 7-30V DC
	output 0-5V	7-30V DC
	output 0-10V	12-30V DC
Current consumption	typ. < 1.3mA	
Digital interface	E2-interface	level = 3.3V / ±0.1V
Housing	polycarbonate / IP65	
Sensor protection	metal grid filter	
Electromagnetic compatibility	EN61326-1	EN61326-2-3
	Industrial Environment	
Temperature ranges	working temperature: -40...80°C (-40...176°F)	
	storage temperature: -40...80°C (-40...176°F)	


1) refer to the working range of the humidity sensor HC101

2) serial protocol refer to www.epluse.com




Dimensions (mm)

EE08 with cable (Type E)

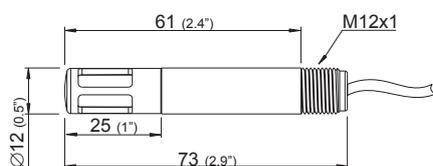

EE08 with connector (Type D)

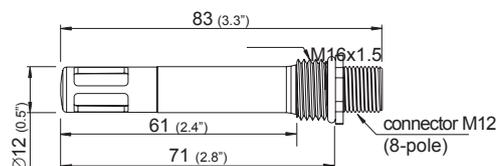


Connection Diagram

Type E:

	Temp. active	Temp. passive, 4-wire
T-passive	white (not connected)	white, black
T-passive	blue (not connected)	blue, violet
GND	pink	pink
T-out	grey	grey (not connected)
RH-out	yellow	yellow
SCL } E2- SDA } interface	green	green
	brown	brown
+UB	red	red

Type D:

1	T-passive	} E2-interface
2	SDA	
3	SCL	
4	RH-out	
5	T-out	
6	GND	
7	T-passive	
8	+UB	



Ordering Guide

HOUSING	MODEL	OUTPUT	SUPPLY	T-SENSOR (passive, 4-wire)	TYPE
polycarbonate (P)	humidity active / temperature active (FT)	0 - 1V ¹ (1)	4.5 - 15V DC (V10)	Pt 100 DIN A (A)	with connector (D)
		0 - 2.5V ¹ (7)	7 - 30V DC (V11)	Pt 1000 DIN A (C)	with cable (E)
	humidity active / temperature passive (FP)	0 - 5V ² (2)			
		0 - 10V ² (3)			
EE08-					

1) possible with supply 4.5 - 15V DC (V10) or 7 - 30V DC (V11)
2) possible with supply 7 - 30V DC (V11) only

FILTER	COATING	CABLE LENGTH (Type E only)	T-UNIT	T-SCALING
metal grid filter (6)	without coating (no code)	1m (3.3ft) (01)	metric (no code)	-40...80 (T22)
	with coating (HC01)	2m (6.6ft) (02)	non metric (E01)	-40...60 (T02)
		5m (16.4ft) (05)		-30...70 (T08)
				-20...80 (T24)
				-20...50 (T48)
				other (Txx)

Order Example

EE08-PFT2V11E602T22

housing: polycarbonate
model: humidity active / temp. active
output: 0 - 5V
supply: 7 - 30V DC
type: with cable

filter: metal grid filter
coating: without
cable length: 2m (6.6ft)
T-unit: non metric
T-scaling: -40...80°C

Accessories / Replacement Parts

- M12 connection cable for type D, length 1,5m (5ft) (HA010322)
- M12 connection cable for type D, length 3m (10ft) (HA010323)
- M12 connection cable for type D, length 5m (16.4ft) (HA010324)
- M12 connection cable for type D, length 10m (32.8ft) (HA010325)
- radiation shield (HA010506)
- M12 female socket with wires (HA010703)
- M12 female cable connector assembly possible (HA010704)
- metal grid filter (HA010113)

Configuration equipment: The configuration equipment allows humidity and temperature adjustment of the sensor.

- configuration cable (HA011005)
- configuration software: free download under www.epluse.com/EE08

