



#### Main features

- Ranges: from: 0...1000 to 0...5000 bar
- Output signal 4...20mA 2 wires / 0,1...5,1Vdc / 0.1...10.1Vdc / 0...5Vdc / 0...10Vdc / 1...5Vdc / 1...6Vdc / 1...10Vdc
- Protection: IP65/IP67
- Wetted parts: 15-5PH / 17-4PH stainless steel
- Measurement diaphragm with monolithic stainless steel structure
- Digital Auto-Zero & Span function
- Suitable for measuring static and dynamic pressure \*

Series TPHADA transmitters for high pressure are based on the extensimetric measurement principle with strain gauge on stainless steel. The measurement diaphragm with monolithic structure makes the transmitter highly efficient, reliable, and safe – extremely important factors in high-pressure applications.

The entire mechanical structure, with vent holes, is designed to guarantee safety and makes the transducer suitable for measuring

both static and dynamic pressure, even under harsh conditions. The TPHADA is particularly suitable for applications in high and very high pressure hydraulic circuits, such as (for example) on test benches or on waterjet cutting machines.

State-of-the-art electronics provides a wide range of output signals in current and in voltage, and the innovative digital "Auto-Zero & Span" function provides quick and easy automatic adjustment of zero after installation with a simple touch of the magnetic pen (supplied).

#### TECHNICAL DATA

|  | VOLTAGE   | CURRENT            |
|--|---|--------------------|
| Output signal  |   |                    |
| Accuracy (1)   | ± 0.1% FSO typical; ± 0.2% FSO max                              |                    |
| Measurement range                                      | from 0...1000 to 0...5000 bar / from 0...15000 to 0...70000 psi |                    |
| Resolution   | Infinite  |                    |
| Overpressure (without degrading)                       | 2 x FS (max 6000 bar)   |                    |
| Burst pressure   | 3 x FS (max 7500 bar)   |                    |
| Pressure media   | 15-5PH (1.4545) / 17-4PH (1.4542) stainless steel               |                    |
| Body materials   | AISI 304 (1.4301) stainless steel                               |                    |
| Power supply   | <b>B/M/P/R</b> 10...30Vdc<br><b>C/N/Q</b> 15...30Vdc            | 10...30Vdc         |
| Measurement principle                                  | Bonded Strain gauge on steel (4 active elements)                |                    |
| Insulation resistance                                  | > 1000 MΩ @ 50Volt  |                    |
| Output signal at zero                                  | <b>B, C, M, N, P, Q, R</b> ±0.5% FSO                            | 4mA (E) ±0.5% FSO  |
| Output signal at full scale                            | <b>B, C, M, N, P, Q, R</b> ±0.25% FSO                           | 20mA (E) ±0.25% FS |
| Max current absorption                                 | 13mA  | 32mA               |
| Max. permitted load                                    | 1mA   | see diagram        |
| Zero adjustment  | ±10% FSO digital, with magnetic pen                             |                    |
| Full scale adjustment                                  | ±5% FSO digital, with magnetic pen                              |                    |
| Calibration signal                                     | 80% FSO nominal   |                    |
| Long-term stability                                    | < 0.2% FSO/Year (at rated condition)                            |                    |
| Operating temperature range (process) (3)              | -30...+120°C (-22...+248°F)                                     |                    |
| Compensated temperature range (2)                      | -10...+85°C (14...+185°F)                                       |                    |
| Storage temperature range                              | -30...+105°C (-22...+221°F)                                     |                    |
| Temperature effects over compensated range (zero-span) | ±0.01% FSO/°C typical (±0.015% FSO/°C max.)                     |                    |
| Response time (10...90%FSO)                            | < 1 msec.   |                    |
| Mounting position effects                              | Negligible  |                    |
| Humidity   | Up to 100%RH non condensing                                     |                    |
| Weight   | 330 gr. nominal   |                    |
| Mechanical shock                                       | according IEC 60068-2-27 100g/11msec                            |                    |
| Vibrations   | according IEC 60068-2-6 20g max a 10...2000Hz                   |                    |
| Ingress protection                                     | IP65/IP66/IP67  |                    |
| Output short circuit and reverse polarity protection   | YES   |                    |

FSO = Full Scale Output

\* Infinite number of cycles for dynamic measurement cycles with range between 0 and 70%FS

1 Includes combined effects of Non-Linearity BFSL (Best Fit Straight Line), Hysteresis and Repeatability.


2 temperatures outside compensated range may cause zero signal drift

3 room temperature and/or temperature of electronics must not exceed 105°C




## ELECTRICAL CONNECTION - Connectors

**P** - 7 pole connector




Male connector  
09-0127-09-07  
Protection IP67

**V** - 6 pole connector




Male connector  
VPT02A10-6PT2  
Protection IP66

**F** - 4 pole cable

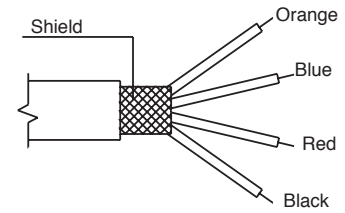


Shielded cable 4x0,25 - 1m. (output E)  
Protection IP65

**Z** - 4 pole male connector M12 x 1




4 pin Male connector  
serie 713  
Protection IP67

**E** - EN 175301-803 Type A  
**M** - EN 175301-803 Type C-ind



4 Pin DIN Type A  
Protection IP65  
4 Pin MicroDIN Tipo C-industrial  
Protection IP65


**F** - 6 pole cable

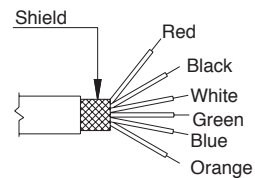


Shielded cable 6x0,25 - 1m  
Protection IP65

## ELECTRICAL CONNECTION - Connection diagrams


### VOLTAGE AMPLIFIED OUTPUT - mod. B/C/M/N/P/Q/R

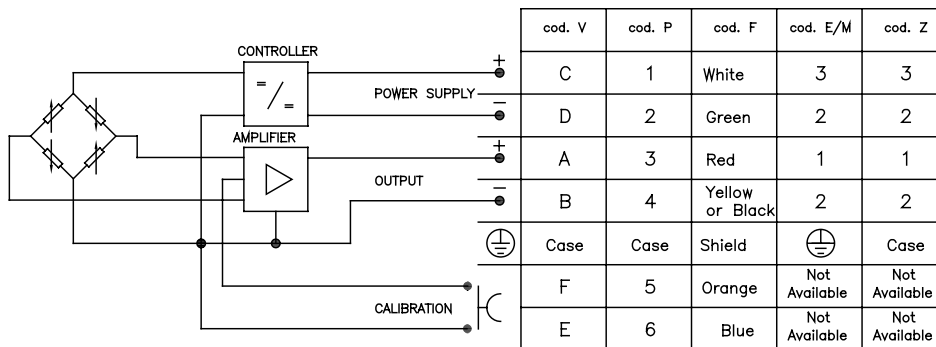

### CURRENT AMPLIFIED OUTPUT - mod. E

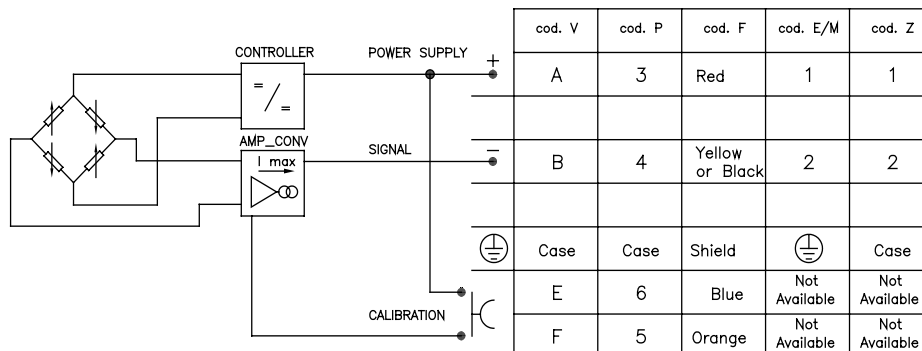

### LOAD DIAGRAM (Current output)

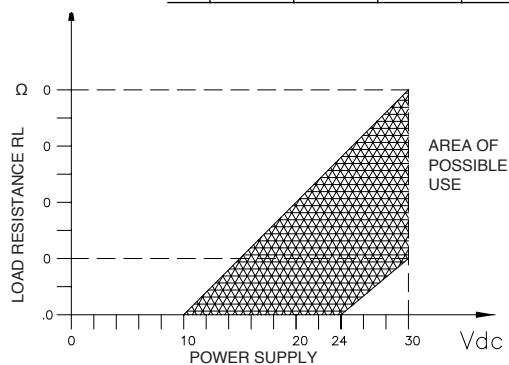

**Note:** The "Digital Autospan" function is activated by means of the "Calibration" contacts shown in the above diagram. For operation and complete functions, see the user manual (downloadable on [www.gefran.com](http://www.gefran.com)).

## DIGITAL AUTOZERO& SPAN – Technical Data



|                            |   |
|----------------------------|---|
| Autozero                   | ±10%FS max with positioning within setting tolerance of sensor, at room temperature                   |
| Autozero Setting Time      | 1...10 seconds  |
| Fine Zero Adjustment       | Resolution 6 mV (voltage); 12 µA (current)  |
| Fine Adjustment Amplitude  | ±100 mV (voltage), ±0.16 mA (current) in successive steps with max setting time of 5 seconds per step |
| Calibration                | Output signal generation 80%FS at room temperature  |
| Autospan Activation Time   | > 1 sec. (via closing of contacts in CAL position)  |
| Autospan                   | ±5%FS max with positioning within setting tolerance of sensor, at room temperature                    |
| Autospan Setting Time      | 1...10 sec. (via closing of contacts in CAL position)   |
| Partial Reset              | Factory zero is reset   |
| Partial Reset Setting Time | 30...60 sec   |
| Total Reset                | Factory settings are reset  |
| Total Reset Setting Time   | > 60 sec.   |
| Function Activation        | Via pen with magnetic point (PKIT 312) supplied   |

For operation and complete functions, see the user manual (downloadable on [www.gefran.com](http://www.gefran.com)).

## ACCESSORIES ON REQUEST

| Connectors  |   |
|---|---|
| <b>Connection E</b><br>3 poles Connector + ground EN175301-803 Type A<br>Prot. IP65<br><b>CON 006</b>     | <b>Connection P</b><br>7 pole female cable connector<br>Prot. IP67<br><b>CON 321</b>      |
| <b>Connection M</b><br>3 poles Connector + ground EN175301-803<br>Type C-ind Prot. IP65<br><b>CON 008</b> | <b>Connection P</b><br>7 pole female cable connector<br>Prot. IP40<br><b>CON 320</b>      |
| <b>Connection Z</b><br>4 pole female cable connector M12x1<br>Prot. IP67<br><b>CON 293</b>                | <b>Connection P</b><br>7 pole female cable connector, 90°<br>Prot. IP40<br><b>CON 322</b> |
| <b>Connection Z</b><br>4 pole female cable connector, 90°M12x1<br>Prot. IP67<br><b>CON 050</b>            | <b>Connection V</b><br>6 pole female cable connector<br>Prot. IP66<br><b>CON 300</b>      |

## EXTENSION CABLES

6-pole female connector (CON 300) + 2 m cable (6x0.25)  
 6-pole female connector (CON 300) + 4 m cable (6x0.25)  
 6-pole female connector (CON 300) + 6 m cable (6x0.25)  
 6-pole female connector (CON 300) + 8 m cable (6x0.25)  
 6-pole female connector (CON 300) + 10 m cable (6x0.25)  
 6-pole female connector (CON 300) + 15 m cable (6x0.25)  
 6-pole female connector (CON 300) + 20 m cable (6x0.25)  
 6-pole female connector (CON 300) + 25 m cable (6x0.25)  
 6-pole female connector (CON 300) + 30 m cavo (6x0.25)  
 Other lengths

**C02WLS**  
**C04WLS**  
**C06WLS**  
**C08WLS**  
**C10WLS**  
**C15WLS**  
**C20WLS**  
**C25WLS**  
**C30WLS**  
**on request**

| Cable color code |              |
|------------------|--------------|
| Pin              | Wire         |
| A                | Red          |
| B                | Yellow/Black |
| C                | White        |
| D                | Green        |
| E                | Blue         |
| F                | Orange       |



## Website

[www.SensorsONE.co.uk](http://www.SensorsONE.co.uk)

## Email

enquiries [at] SensorsONE.co.uk

## QR Code

Save the SensorsONE website address to your mobile smartphone by scanning this QR code

