

DMK 458

Pressure Transmitter for Marine and Offshore

Ceramic Sensor

accuracy according to IEC 60770:
 standard: 0.25 % FSO
 option: 0.1 % FSO



Nominal pressure

from 0 ... 40 mbar up to 0 ... 20 bar

Output signals

2-wire: 4 ... 20 mA
 Others on request

Product characteristics

- ▶ LR-certificate (Lloyd's Register)
- ▶ GL-certificate (Germanischer Lloyd)
- ▶ DNV-certificate (Det Norske Veritas)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ CCS-certificate (China Classification Society)
- ▶ high overpressure resistance
- ▶ excellent long term stability




Optionale Ausführungen

- ▶ IS-version
Ex ia= intrinsically safe for gases
- ▶ diaphragm Al₂O₃ 99.9 %
- ▶ pressure port CuNiFe

The pressure transmitter DMK 458 has been developed for marine and offshore applications. In addition to thread connections, different flush versions are available, which are especially suitable for pasty, viscous, and polluted media.

Due to the capacitive ceramic sensor developed by BD|SENSORS, which is optionally available in Al₂O₃ 99.9 %, the DMK 458 shows an outstanding accuracy as well as a high overload and temperature resistance.

Preferred areas of use are

-  Monitoring of pressure during loading and unloading processes
-  Monitoring of a ship's position and draught
- Use in anti-heeling systems
-  Level measurement in ballast and storage tanks



DMK 458

Transmitter for Marine and Offshore

Technical Data

Pressure ranges																
Nominal pressure ¹	[bar]	0.04	0.06	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	20
Level	[mH ₂ O]	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	200
Overpressure	[bar]	2	2	4	4	6	6	8	8	15	25	25	35	35	45	45
Permissible vacuum	[bar]	-0.2		-0.3		-0.5			-1							
¹ available in gauge and absolute; nominal pressure ranges absolute from 1 bar																
Output signal / Supply																
Standard	2-wire: 4 ... 20 mA / V _S = 9 ... 32 V _{DC}									V _{S rated} = 24 V _{DC}						
Option IS-version	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC}									V _{S rated} = 24 V _{DC}						
Performance																
Accuracy ²	standard: ≤ ± 0.25 % FSO									option: for P _N ≥ 0.6 bar ³ : ≤ ± 0.1 % FSO						
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω															
Long term stability	≤ ± 0.1 % FSO / year at reference conditions															
Influence effects	supply: 0.05 % FSO / 10 V									load: 0.05 % FSO / kΩ						
Turn-on time	700 msec															
Mean response time	< 200 msec									mean measuring rate 5/sec						
Max. response time	380 msec															
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																
³ Under the influence of disturbance burst according to EN 61000-4-4 (2004) +2 kV accuracy decreases on ≤ ± 0.25 % FSO.																
Thermal effects																
Thermal error	≤ ± 0.1 % FSO / 10 K in compensated range -20 ... 80 °C															
Permissible temperatures																
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 100 °C															
Electrical protection																
Short-circuit protection	permanent															
Reverse polarity protection	no damage, but also no function															
Electromagnetic compatibility	emission and immunity according to EN 61326 and Germanischer Lloyd (GL)															
Mechanical stability																
Vibration	4 g (according to GL: curve 2 / basis: DIN EN 60068-2-6)															
Materials																
Pressure port	standard: stainless steel 1.4404 (316 L) option for threaded connections: CuNi10Fe1Mn - on request															
Housing	stainless steel 1.4404 (316 L)															
Cable sheath for version cable outlet	TPE -U (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)															
Cable gland for version field housing	absolute, sealed gauge: brass, nickel plated gauge: polyamide (with integrated pressure reference) others on request															
Seals (media wetted)	FKM others on request															
Diaphragm	standard: ceramics Al ₂ O ₃ 96 % option: ceramics Al ₂ O ₃ 99.9 %															
Media wetted parts	pressure port, seals, diaphragm															
Category of the environment																
Lloyd's Register (LR)	EMV1, EMV2, EMV3 ⁴ , EMV4									number of certificate: 13/20055						
Germanischer Lloyd (GL)	D, F, EMC 1									number of certificate: 75 012 - 09 HH						
Det Norske Veritas (DNV)	temperature: D humidity: B									vibration: B						
	electromagnetic compatibility: B									number of certificate: A-12144						
⁴ not valid for IS-version (DX14A-DMK 458)																
IS protection																
Approval DX14A-DMK 458	IBExU 07 ATEX 1180 X field housing zone 0: II 1G Ex ia IIC T4 Ga ISO 4400, M12x1, cable outlet: zone 0: II 1G Ex ia IIB T4 Ga															
Safety technical maximum values	U _i = 28 V; I _i = 93 mA; P _i = 660 mW field housing: C _i = 52.3 nF; L _i = 5 μH; 90.2 nF opposite GND ISO 4400, M12x1, cable outlet: C _i = 105 nF; L _i = 5 μH; 140 nF opposite GND															
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C															
Permissible temperatures for medium	-40 ... 85 °C															
Miscellaneous																
Ingress protection	IP65, IP 67, IP68															
Installation position	any															
Current consumption	max. 21 mA															
Weight	min. 400 g (depending on housing and mechanical connection)															
Operational life	> 100 x 10 ⁶ cycles															
CE conformity	EMC Directive: 2014/30/EU															
ATEX Directive	2014/34/EU															


DMK 458

Transmitter for Marine and Offshore

Technical Data

Wiring diagram


2-wire-system (current)

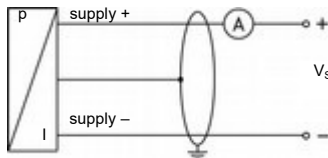

Pin configuration

Electrical connections	ISO 4400	field housing (clamp section: 2.5 mm ²)	M12x1 (4-pin) metal	cable colours (IEC 60757)
Supply +	1	VS+	1	wh (white)
Supply -	2	VS-	2	bn (brown)
Shield	ground contact	⏏	4	gnye (green-yellow)

Electrical connections (dimensions in mm)

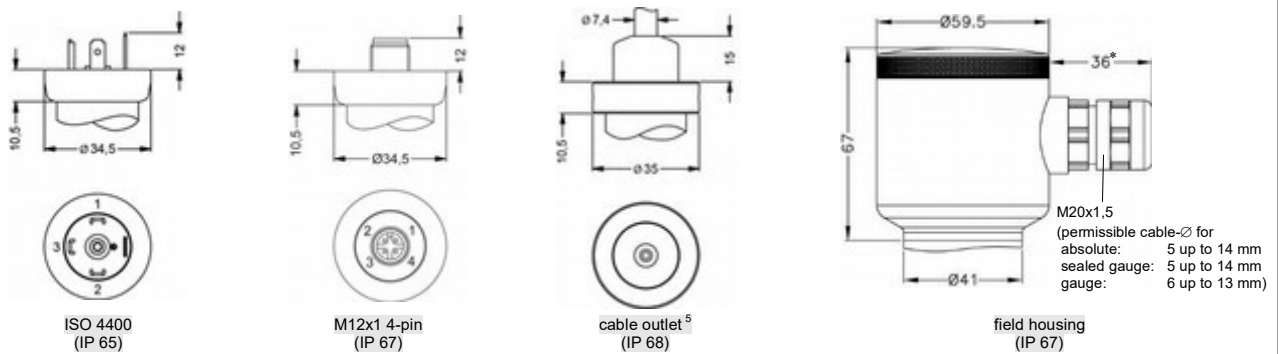


* for gauge pressure ranges with field housing the marked dimension increases by 8 mm


⁵ cable versions are delivered with shielded cable (different lengths available);
for gauge pressure cable with ventilation tube required; tested at 4 bar or 40 mH₂O for 24 hours

Dimensions (in mm)


Inch thread

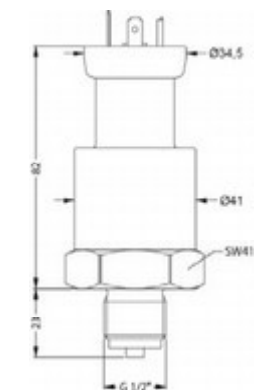


G1/2" EN 837
with plug version and cable outlet

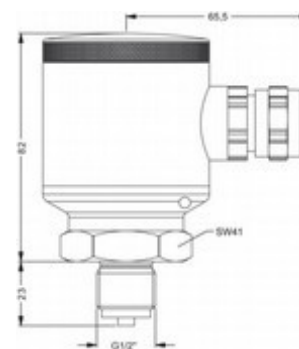

G1/2" EN 837
with field housing



G1/2" DIN 3852

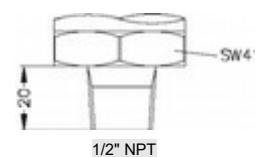


1/2" NPT

⇒ For version field housing with pressure port in CuNi10Fe1Mn, total length increases by 27 mm!


Dimensions (in mm)

Flange ⁶ (DIN 2501)

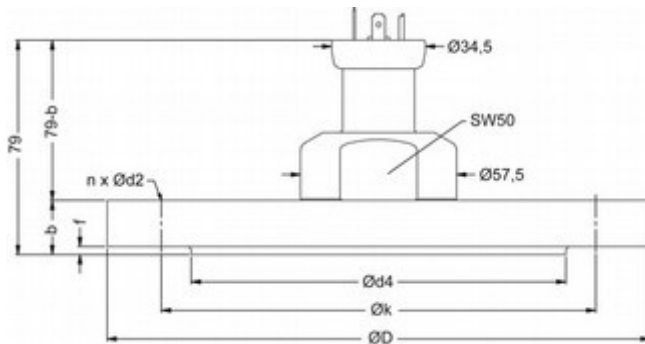

with plug version and cable outlet


dimensions in mm				
size	DN25/PN40	DN40/PN40	DN50/PN40	DN80/PN16
D	115	150	165	200
k	85	110	125	160
d4	68	88	102	138
b	18	18	20	20
f	2	3	3	3
n	4	4	4	8
d2	14	18	18	18

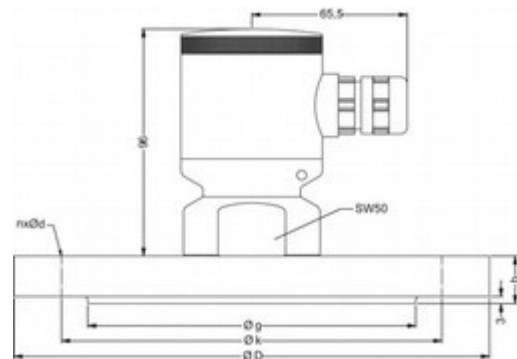

with field housing

dimensions in mm				
size	DN25/PN40	DN40/PN40	DN50/PN40	DN80/PN16
D	115	150	165	200
k	85	110	125	160
g	68	88	102	138
b	18	18	20	20
n	4	4	4	8
d	14	18	18	18

Flange ⁶ (ANSI)

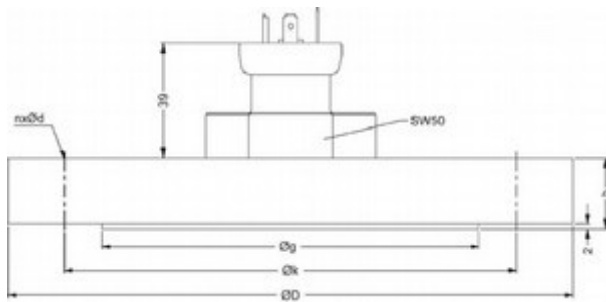

with plug version and cable outlet

dimensions in mm		
size	2"/150 lbs	3"/150 lbs
D	152.4	190.5
g	91.9	127
k	120.7	152.4
b	19.1	23.9
n	4	4
d	19.1	19.1

⇒ For version field housing with pressure port in CuNi10Fe1Mn, total length increases by 27 mm!

⁶ DN80/PN16 possible for nominal pressure ranges $P_N \leq 16$ bar; 2"/150 lbs and 3"/150 lbs possible for nominal pressure ranges $P_N \leq 10$ bar

