



DPT 200

Differential Pressure Transmitter for Process Industry with HART®-Communication

accuracy according to IEC 61298-2:
0.075 % FSO

Differential pressure

from 1 mbar up to 20 bar

Static pressure

max. 400 bar

Output signal

2-wire: 4 ... 20 mA

Special characteristics

- ▶ static over pressure 400 bar
- ▶ rangeability max. 100:1
- ▶ aluminium die cast case
- ▶ HART[®]-communication
- ▶ output signal: linear or square root extraction

Optional versions

- ▶ Ex-version group I
 - Ex ia = intrinsically safe version for firedamp mines
- ▶ Ex-version group II
 - Ex ia = intrinsically safe version
 - Ex d = flameproof enclosure
- ▶ LC display
- ▶ stainless steel housing

The differential pressure transmitter DPT 200 has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

DPT 200 can be equipped with various chemical seals and different membrane materials to reach an optimal adaptation to the application.

Preferred areas of use are



Oil and gas industry



Chemical and petrochemical industry



Energy industry



Food and beverage




Paper industry



Differential pressure ranges					
Sensor type	A ¹	B	C	D	E
Differential pressure range dp	10 mbar	60 mbar	400 mbar	2.5 bar	20 bar
Setting limits (offset and span in this range freely adjustable)	-10 ... 10 mbar	-60 ... 60 mbar	-400 ... 400 mbar	-2.5 ... 2.5 bar	-20 ... 20 bar
Lowest permissible span	1 mbar	2 mbar	4 mbar	25 mbar	200 mbar
Permissible static pressure optional	70 bar -	160 bar -	160 bar 400 bar	160 bar 400 bar	160 bar 400 bar
Rangeability TD (with respect to the differential pressure range dp)	10:1	30:1	100:1	100:1	100:1

¹ only possible in combination with process connection (code N20), without valve (code 0) and with PTFE seal (code 4)

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA with HART® communication / V _S = 16.5 ... 42 V _{DC}
Option IS-version	2-wire: 4 ... 20 mA with HART® communication / V _S = 16.5 ... 28 V _{DC}
Error signal Namur NE43	high / low (adjustable)
Performance	
Accuracy	turn-down ≤ 10:1: ≤ ± 0.075 % FSO turn-down > 10:1: ≤ ± [0.0075 x turn-down] % FSO sensor type A: turn-down ≤ 10:1: ≤ ± [0.075 + 0.025 x turn-down] % FSO with turn-down = nominal pressure range / adjusted range (FSO = Full Scale Output)
Influence supply	≤ 0.001 % FSO / 10 V
Influence static pressure	type A: ± [0.015 mbar + 0.1 % of the adjusted range] / 40 bar type B: ± [0.06 mbar + 0.075 % of the adjusted range] / 160 bar type C: ± [0.2 mbar + 0.05 % of the adjusted range] / 160 bar type D: ± [1.25 mbar + 0.05 % of the adjusted range] / 160 bar type E: ± [10 mbar + 0.05 % of the adjusted range] / 160 bar
Influence installation position	max. 400 Pa (can be compensated by zero-point correction)
Long term stability	type A: ≤ ± (0.5 % x differential pressure range dp) / year at reference conditions type B: ≤ ± (0.2 % x differential pressure range dp) / year at reference conditions type C - E: ≤ ± (0.1 % x differential pressure range dp) / year at reference conditions
Permissible load	R _{max} = [(V _S - 16.5 V) / 0.023 A] Ω HART®-communication: R = 230 Ω ... 600 Ω
Response time	type A: approx. 1.6 sec type B: approx. 0.4 sec type C: approx. 0.2 sec type D: approx. 0.2 sec type E: approx. 0.1 sec
Damping	electronic: 0.1 ... 60 sec plus response time
Thermal effects (offset and span)	
Temperature range -20 ... +65 °C	type A: ± [0.45 x turn-down + 0.25] % of the adjusted range type B: ± [0.30 x turn-down + 0.20] % of the adjusted range type C - E: ± [0.20 x turn-down + 0.10] % of the adjusted range
Temperature range -40 ... -20 °C and +65 ... +100 °C	type A: ± [0.45 x turn-down + 0.25] % of the adjusted range type B: ± [0.30 x turn-down + 0.20] % of the adjusted range type C - E: ± [0.20 x turn-down + 0.10] % of the adjusted range
Permissible temperatures	
Environment / storage	without display: -40 ... 85 °C with display: -20 ... 65 °C (85 °C without function)
Media wetted parts	silicone oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.) fluorolube oil: -40 ... 100 °C (information: +125 °C short time, max. 30 min.)
Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Mechanical stability	
One-sided overload	according to the maximum static pressure of differential pressure sensor
Vibration	5 g RMS / 10 ... 2000 Hz according to DIN EN 60068-2-6
Shock	500 g / 1 msec half sine according to DIN EN 60068-2-27
Filling fluids	
Standard	silicone oil (-40 ... 125 °C)
Option (on request)	fluorolube oil (-40 ... 125 °C) others on request

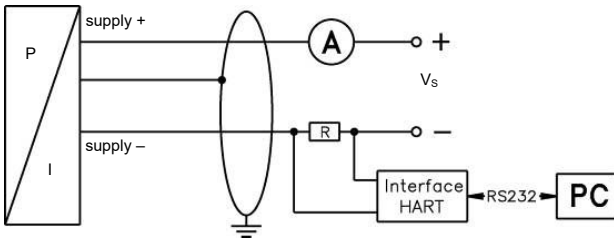Materials	
Pressure port / flange	standard: stainless steel 1.4401 (316) option with volume reduced flange: stainless steel 1.4301 (304) others on request
Housing	standard: aluminium die cast with epoxy painting (blue) option: stainless steel 1.4404 (316L) others on request
Cable gland	aluminium die cast housing: PA grey (for cable-Ø 5 ... 9 mm) stainless steel housing: stainless steel 1.4404 (316L) (for cable-Ø 7 ... 12 mm) option IS-version: specified under "Explosion protection"
Vent and dump valves, blanking plugs, type plate	stainless steel 1.4401 (316) others on request
Bolts and nuts	steel, zinc flake coated
Seals	standard: FKM (-30 ... 250 °C) options: EPDM (-40 ... 125 °C) NBR (-40 ... 125 °C) PTFE (-180 ... 250 °C) others on request
Diaphragm	standard: stainless steel 1.4435 (316L) option: Hastelloy® C-276 (2.4819) others on request
Media wetted parts	pressure port, seal, diaphragm
Explosion protection – aluminium die cast housing	
Approval AX18-DPT200 intrinsically safe version	IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group II: II 1/2G Ex ia IIC T4 Ga/Gb / II 2D Ex ia IIIC T 85 °C Db safety technical maximum values: $P_i = 660 \text{ mW}$, $U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $C_i = 29.7 \text{ nF}$, L_i negligible permissible temperatures for environment: -40 ... 60 °C cable gland in PA grey; for cable-Ø 5 ... 9 mm
Approval AX18B-DPT200 flameproof enclosure	IBExU 15 ATEX 1110 X / IECEx IBE 16.0006X group II: II 2G Ex db IIC T6 Gb permissible temperatures for environment: -40 ... 65 °C cable gland in brass; for cable-Ø 10 ... 14 mm
Explosion protection – stainless steel housing	
Approval AX18-DPT200 intrinsically safe version	IBExU 14 ATEX 1273 X / IECEx IBE 16.0005X group I (mines): I M1 Ex ia I Ma group II: II 1G Ex ia IIC T4 Ga / II 2D Ex ia IIIC T85°C Db safety technical maximum values: $P_i = 660 \text{ mW}$, $U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $C_i = 29.7 \text{ nF}$, L_i negligible permissible temperatures for environment: -40 ... 60 °C cable gland in stainless steel 1.4404 (316L); for cable-Ø 7 ... 12 mm
Miscellaneous	
Display (optionally)	type: LCD, lines: 2, digits: 8, bargraph: 0...100%, rotatability: 90°-steps and / or by turn of display module
Configuration	- offset / span local via 2 buttons - local configuration with an optional display - complete configuration via HART®
Ingress protection	IP 67
Installation position	any
Weight	approx. 3 kg (depending on version)
Current consumption	approx. 23 mA
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU
Wiring diagram	
2-wire-system (current) HART®	
	

DPT 200


Differential Pressure Transmitter

Technical Data


Pin configuration	
Electrical connection	terminal clamps (for cable-Ø max. 2.5 mm²)
Supply + (V_s +)	+
Supply / Test - (V_s -)	-
Test +	TEST +
Ground	⊕

Dimensions (mm / in)

DPT 200 with display

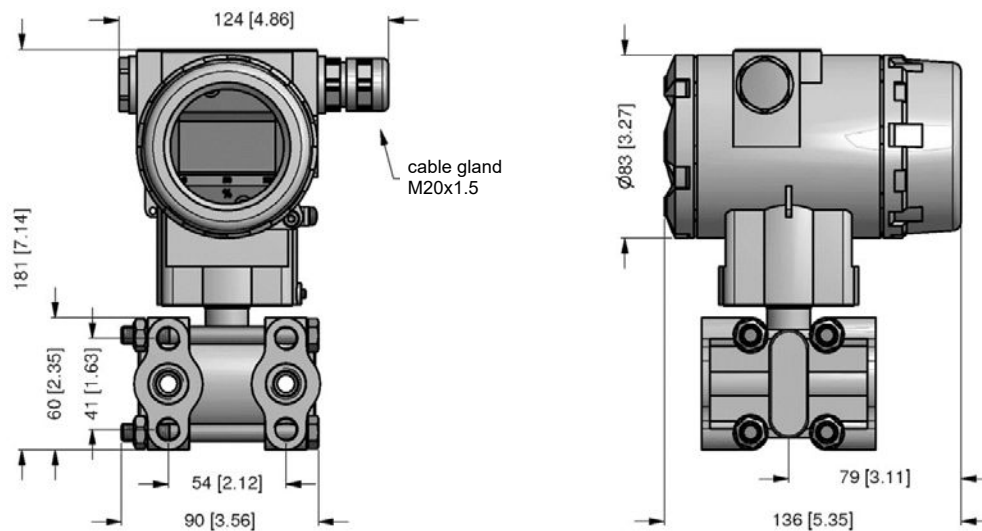


DPT 200 without display

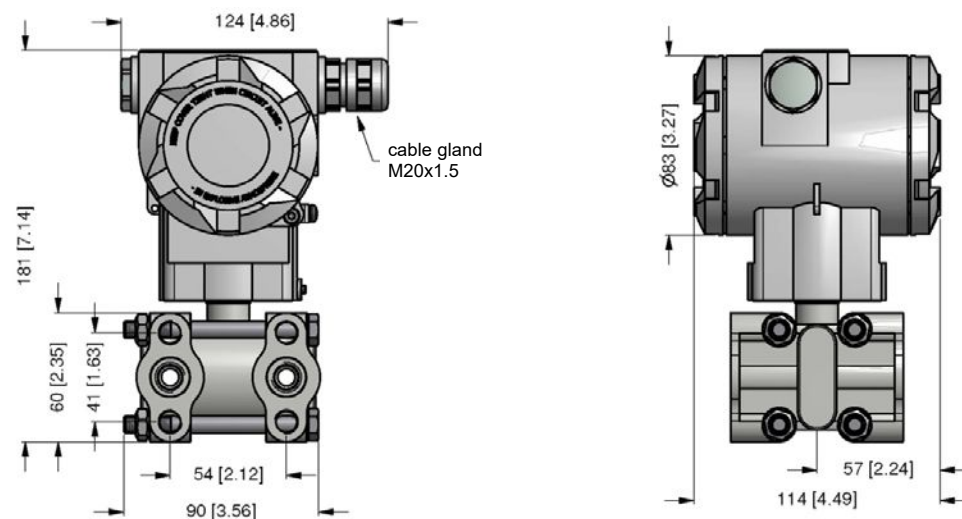


Process connections


code N20
1/4" - 18 NPT / fixing 7/16 UNF

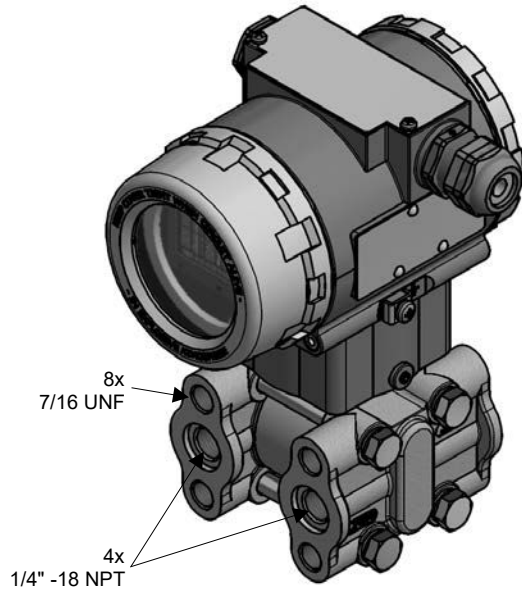


code N30
1/4" - 18 NPT / fixing M10

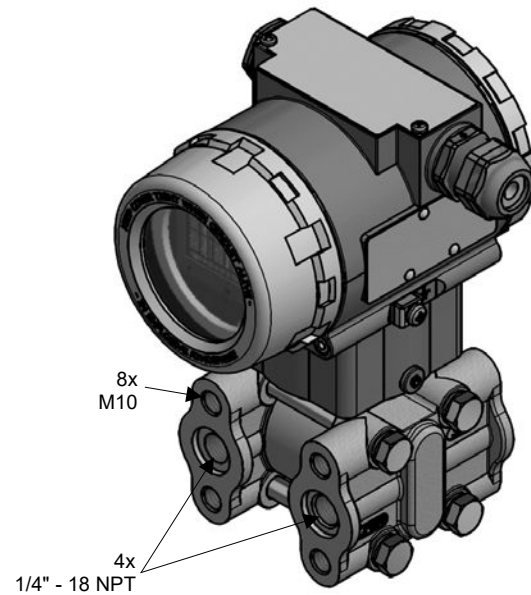

code N25 (volume reduced)
1/4" - 18 NPT vertical / fixing 7/16 UNF

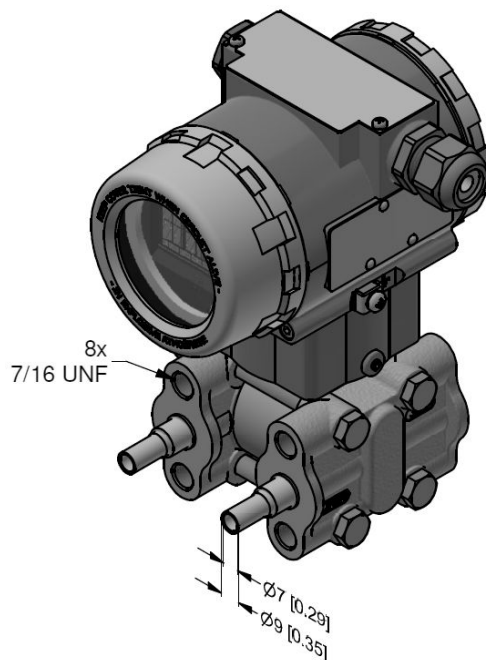


code N31
1/4" - 18 NPT vertical / fixing M10

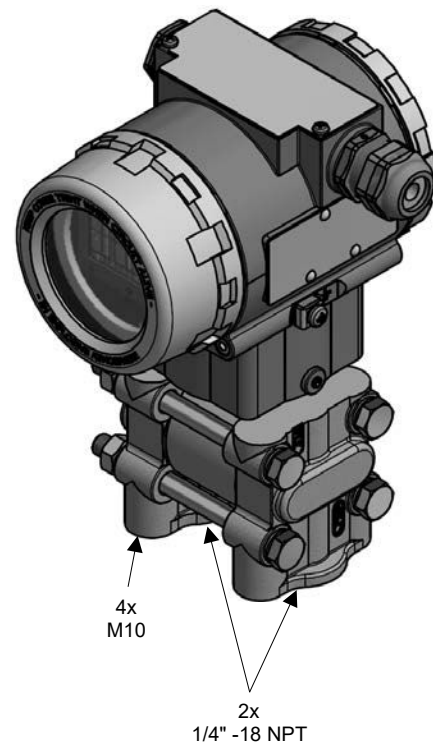

⇒ In scope of delivery two locking screws 1/4" - 18 NPT are included as standard.


Valves (optionally)

code 1

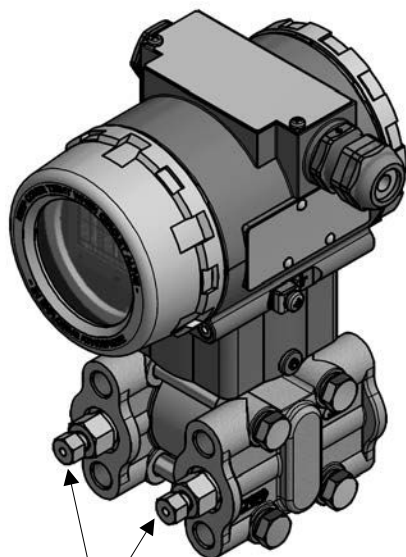


vent position:
straight (2x)

code 2

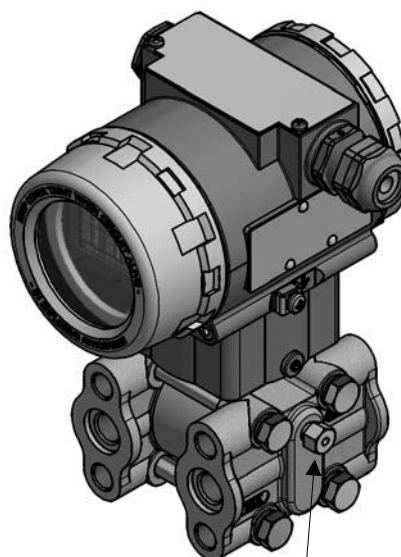



vent position:
top (2x)

code 3

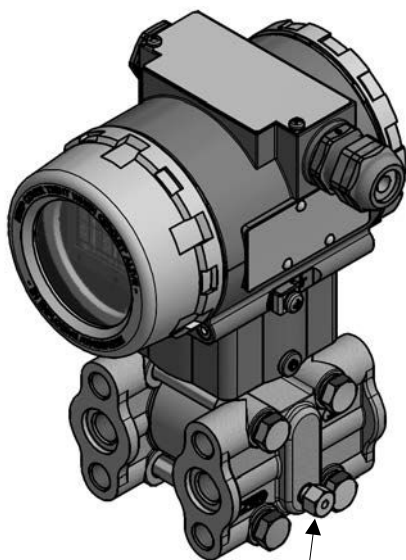

vent position:
bottom (2x)

Oval flange adapter 1/2" NPT female

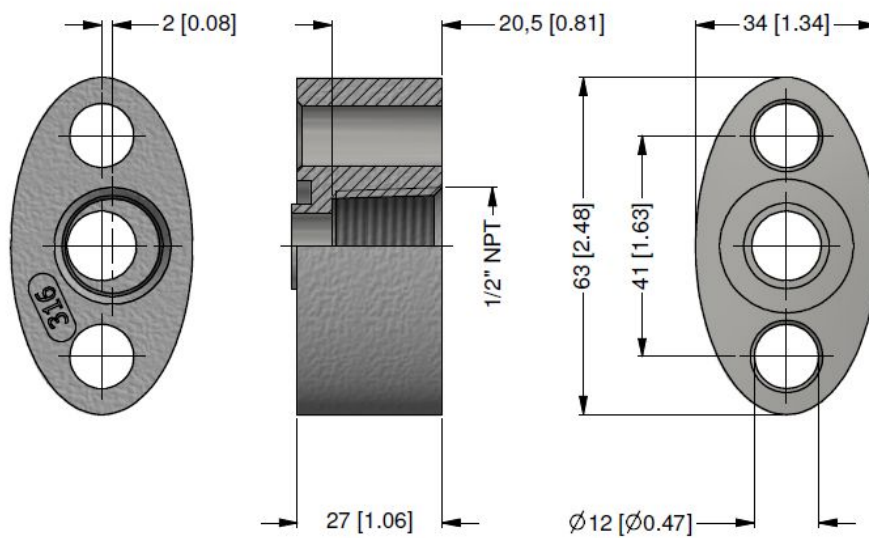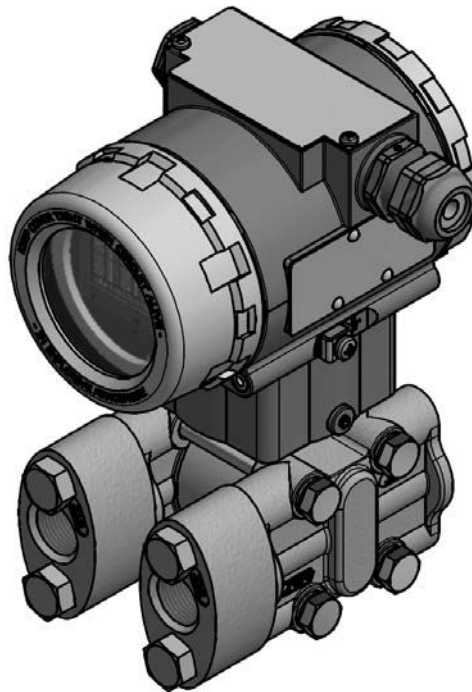

Technical data

Material of adapter	stainless steel 1.4401 (316)
Weight	approx. 300 g
Scope of delivery	two adapter, four locking screws 7/16 UNF x 1 3/4" A2




Ordering type

Oval flange adapter with 1/2" NPT female


Ordering code

Z1004181

Mounting bracket

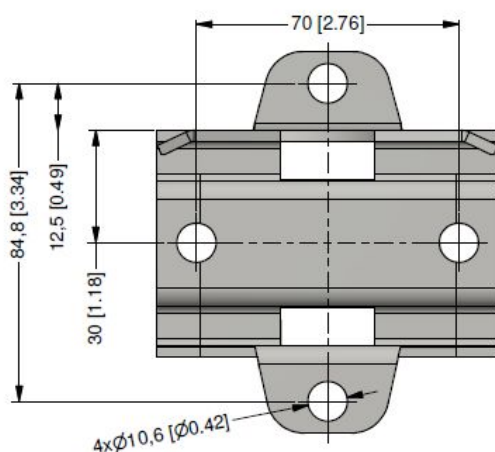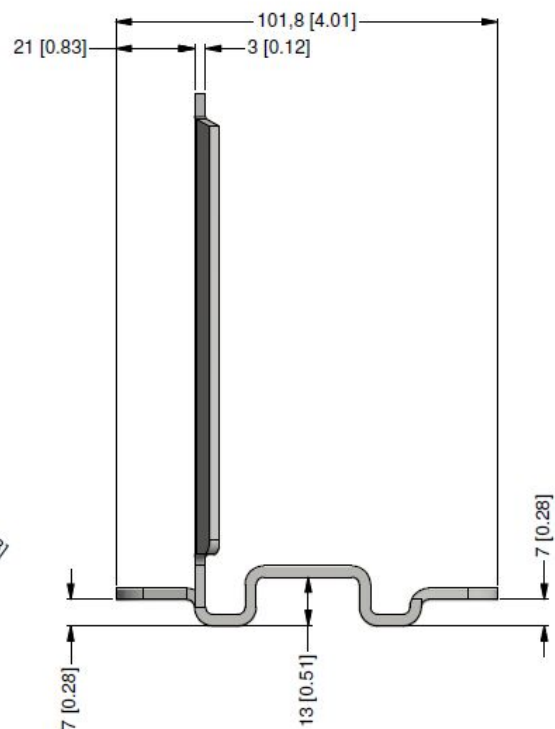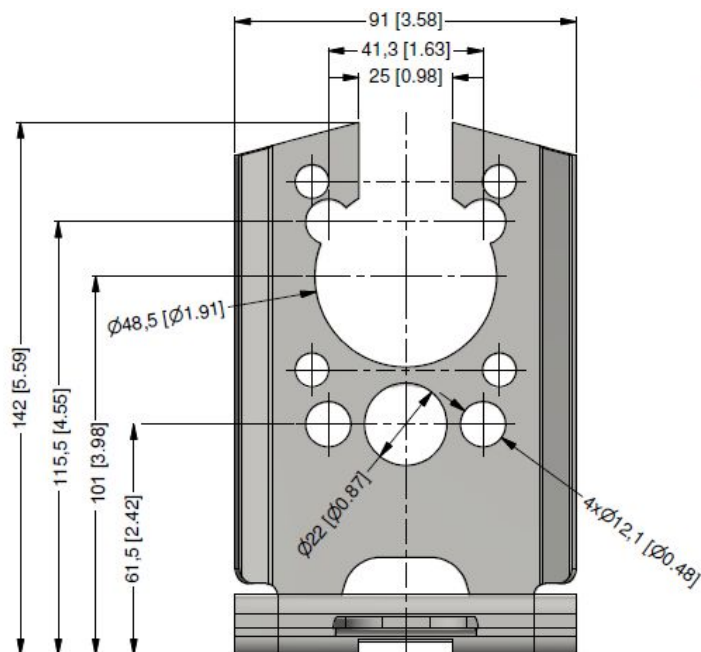

including U-bracket for pipe mounting:

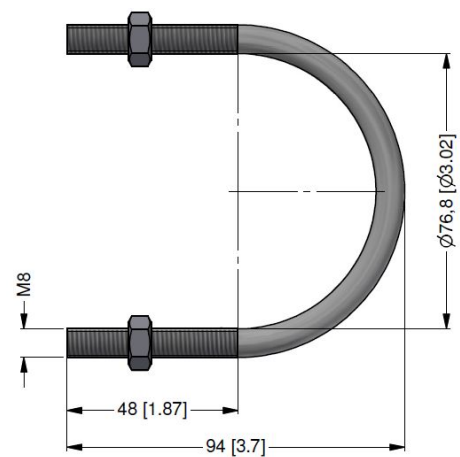

Technical data

Material of mounting bracket	stainless steel 1.4301 (304)
Weight	approx. 500 g
Scope of delivery	mounting bracket, four locking screws 7/16 UNF x 3/4" A2, U-bracket for pipe mounting with two nuts and washers

Ordering type



Mounting bracket

Ordering code



Z1004179

Mounting variants for mounting bracket

wall mounting

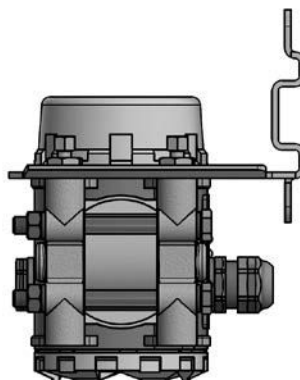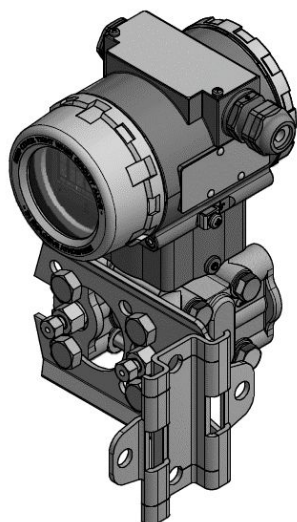

pipe mounting

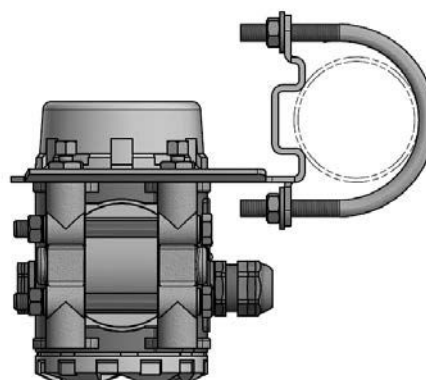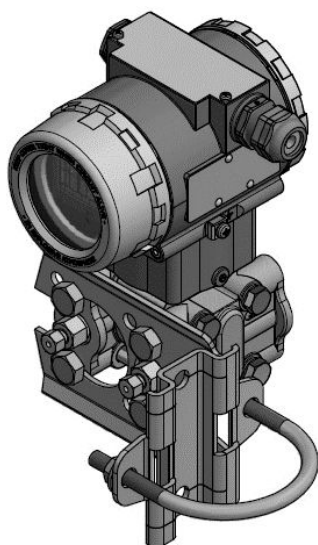

HART® is a registered trademark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.

© 2025 – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DPT 200

[illegible]

Pressure	differential pressure	3	4	3
Input	[bar]			
type A:	0 ... 1 mbar up to 0 ... 10 mbar [†]	A		
type B:	0 ... 2 mbar up to 0 ... 60 mbar	B		
type C:	0 ... 4 mbar up to 0 ... 400 mbar	C		
type D:	0 ... 25 mbar up to 0 ... 2.5 bar	D		
type E:	0 ... 200 mbar up to 0 ... 20 bar	E		
	customer	9		consult
Maximum static pressure				
	70 bar (only type A)	7		
	160 bar (type B - E)	1		
	400 bar (type C - E)	4		
Output				
	4 ... 20 mA / 2-wire	H		
	with HART®-communication			
	group II Ex ia 4 ... 20 mA / 2-wire	I		
	with HART®-communication			
	group II Ex d 4 ... 20 mA / 2-wire	G		
	with HART®-communication			
	group I Ex ia 4 ... 20 mA / 2-wire	FH		
	with HART®-communication (mines)			
	customer	9		consult
Accuracy				
	0.075 %	1	7	
Housing				
	aluminium	L		
	stainless steel 1.4404 (316L)	1		
Display				
	without display	A N		
	with backlight display	A L		
Electrical connection				
	terminals / cable gland M20x1.5	A K 0		
	customer	9 9 9		consult
Process connection H-side / L-side (identical)				
	1/4" - 18 NPT / fixing 7/16 UNF	N 2 0	N 2 0	
	1/4" - 18 NPT / fixing M10	N 3 0	N 3 0	
	1/4" - 18 NPT, vertical / fixing M10	N 3 1	N 3 1	
	1/4" - 18 NPT / fixing 7/16 UNF	N 2 5	N 2 5	
	with volume reduced flange			
	customer	9 9 9	9 9 9	consult
Valve H-side / L-side (identical)				
	without	0	0	
	with vent (straight)	1	1	
	with vent (top)	2	2	
	with vent (bottom)	3	3	
Material flange, valves				
	stainless steel 1.4301 (304)		0 2	
	stainless steel 1.4401 (316)		1 2	
Diaphragm / filling fluid				
	stainless steel 1.4435 (316L) / silicone oil		1 1	
	Hastelloy® C-276 (2.4819) / silicone oil		H 1	
	customer		9 9	consult
Seal				
	FKM		1	
	EPDM		3	
	NBR		5	
	PTFE		4	
	customer		9	consult
Special version				
	standard		0 0 0	
	customer		9 9 9	consult
Accessories				
	oval flange adapter 1/2" NPT female	Z1004181		
	mounting bracket	Z1004179		
	in stainless steel 1.4301 (304)			

² only in combination with aluminium housing³ only in combination with stainless steel housing⁴ only in combination with process connection (co

⁵ only in combination with process connection (code N25) and with

HART® is a registered trade mark of HART Communication Foundation; Hastelloy®

HART is a registered trade mark of HART Communication Foundation; Hastelloy is a brand name of Haynes International Inc.